

# ENVIRONMENTAL PRODUCT DECLARATION

in accordance with ISO 14025, ISO 21930 and EN 15804

|                                |                               |
|--------------------------------|-------------------------------|
| Owner of the declaration:      | Saint-Gobain Sweden AB, Weber |
| Program operator:              | The Norwegian EPD Foundation  |
| Publisher:                     | The Norwegian EPD Foundation  |
| Declaration number:            | NEPD-2615-1327-EN             |
| Registration number:           | NEPD-2615-1327-EN             |
| ECO Platform reference number: | -                             |
| Issue date:                    | 23.12.2020                    |
| Valid to:                      | 23.12.2025                    |

## weber EXM 703 expanderbetong grov

Saint-Gobain Sweden AB, Weber



[www.epd-norge.no](http://www.epd-norge.no)



## General information

**Product:**

weber EXM 703 expanderbetong grov

**Program operator:**

The Norwegian EPD Foundation  
Pb. 5250 Majorstuen, 0303 Oslo  
Phone: +47 23 08 80 00  
e-mail: [post@epd-norge.no](mailto:post@epd-norge.no)

**Declaration number:**

NEPD-2615-1327-EN

**ECO Platform reference number:****This declaration is based on Product Category Rules:**

CEN Standard EN 15804:2012+A1:2013 serves as core PCR.  
NPCR 009:2018 Part B for Technical - Chemical products in the building and construction industry

**Statement of liability:**

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

**Declared unit:**

1 kg weber EXM 703 expanderbetong grov

**Declared unit with option:**

A1,A2,A3,A4,A5

**Functional unit:****General information on verification of EPD from EPD tools:**

Independent verification of data, other environmental information and the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4. Individual third party verification of each EPD is not required when the EPD tool is i) integrated into the company's environmental management system, ii) the procedures for use of the EPD tool are approved by EPDNorway, and iii) the process is reviewed annually. See Appendix G of EPD-Norway's General Programme Instructions for further information on EPD tools.

**Verification of EPD tool:**

Independent third party verification of the EPD tool, background data and test-EPD in accordance with EPDNorway's procedures and guidelines for verification and approval of EPD tools.

Anne Rønning, Norsus AS

(no signature required)

**Owner of the declaration:**

Saint-Gobain Sweden AB, Weber  
Contact person: Anders Anderberg  
Phone: +46 8 625 6105  
e-mail: [anders.anderberg@weber.se](mailto:anders.anderberg@weber.se)

**Manufacturer:**

Saint-Gobain Sweden AB, Weber  
Box 415 , SE-19162 Sollentuna  
Sweden

**Place of production:**

Saint-Gobain Sweden AB  
Riksten ,  
Sweden

**Management system:**

ISO 9001, ISO 14001

**Organisation no:**

SE-556241-2592

**Issue date:** 23.12.2020**Valid to:** 23.12.2025**Year of study:**

2019

**Comparability:**

EPD of construction products may not be comparable if they not comply with EN 15804 and seen in a building context.

**Development and verification of EPD:**

The declaration has been developed and verified using EPD tool lca.tools ver EPD2020.11, developed by LCA.no AS. The EPD tool is integrated into the company's environmental management system, and has been approved by EPD-Norway

Developer of EPD:

Jenny Knutsson

Reviewer of company-specific input data and EPD:

Helene Wallgren

**Approved:**

Sign



Håkon Hauan, CEO EPD-Norge

## Product

### Product description:

Weber EXM 703 is a highly flowable coarse graded underpinning mortar based on CEM I binder. Main areas are concrete renovation, underpinning of columns/machine foundations and anchoring of steel bars.

EXM 703 is used for pouring and laying where a very high-grade and durable concrete is needed. For example, structures that will be exposed to frost and salt, concrete structures exposed to chemical attack and areas subjected to heavy loads. EXM 703 is normally used in layers of 30-300 mm.

### Product specification

The composition of the product is described in the following table:

| Materials | %     |
|-----------|-------|
| Binder    | 25-50 |
| Aggregate | 40-70 |
| Filler    | <5    |
| Binder    | <2    |
| Packaging | 0,02  |

## LCA: Calculation rules

### Declared unit:

1 kg weber EXM 703 expanderbetong grov

### Cut-off criteria:

All major raw materials and all the essential energy is included. The production processes for raw materials and energy flows with very small amounts (less than 1%) are not included. These cut-off criteria do not apply for hazardous materials and substances.

### Data quality:

Specific data for the product composition are provided by the manufacturer. They represent the production of the declared product and were collected for EPD development in the year of study. Background data is based on registered EPDs according to EN 15804, Ostfold Research databases, ecoinvent and other LCA databases. The data quality of the raw materials in A1 is presented in the table below.

| Materials | Source                 | Data quality | Year |
|-----------|------------------------|--------------|------|
| Cement    | Supplier               | EPD          | 2014 |
| Additives | ecoinvent 3.4          | Database     | 2017 |
| Aggregate | ecoinvent 3.4          | Database     | 2017 |
| Filler    | ecoinvent 3.4          | Database     | 2017 |
| Packaging | ecoinvent 3.4          | Database     | 2017 |
| Packaging | Modified ecoinvent 3.4 | Database     | 2017 |
| SC 115    | Owner of EPD           | Database     |      |

### Technical data:

weber exm 703 is tested and approved according to EN 1504-6.

For further information, see [www.se.weber/](http://www.se.weber/)

### Market:

Nordic and Baltic countries

### Reference service life, product

The reference service life of the product is similar to the service life of the building.

### Reference service life, building


50 years

### Allocation:

The allocation is made in accordance with the provisions of EN 15804. Incoming energy and water and waste production in-house is allocated equally among all products through mass allocation. Effects of primary production of recycled materials is allocated to the main product in which the material was used. The recycling process and transportation of the material is allocated to this analysis.

**System boundary:**

All processes from raw material extraction to product transport to the construction site and assembly are included in the analysis (A1-A5). The flow chart below illustrates the system boundaries for the A1 to A3 part of the analysis.

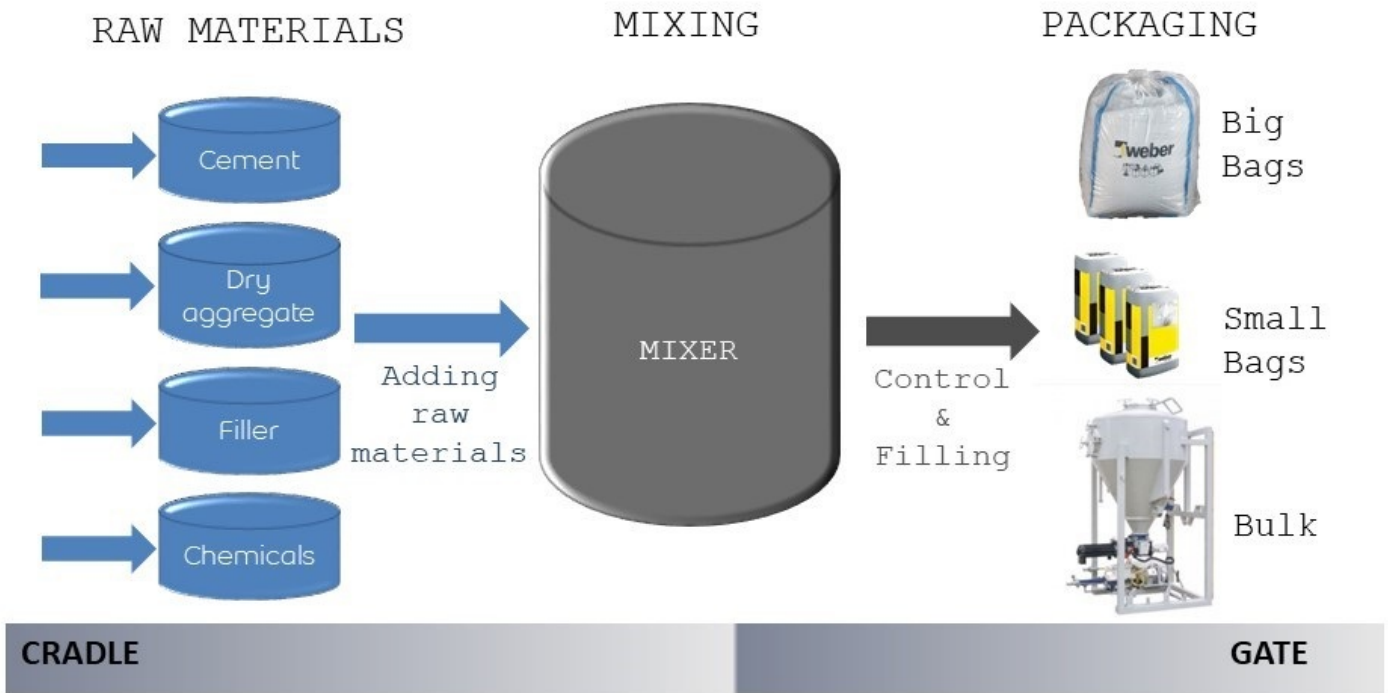

**Additional technical information:**

The remaining powder is classified as hazardous waste. Cured material is inactive and not classified as hazardous waste and may be disposed as construction waste to disposal or recycling.

The packaging properly emptied is not classified as hazardous waste.

## LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

### Transport from production place to user (A4)

| Type                 | Capacity utilisation (incl. return) % | Type of vehicle                     | Distance km | Fuel/Energy consumption | Unit  | Value (l/t) |
|----------------------|---------------------------------------|-------------------------------------|-------------|-------------------------|-------|-------------|
| Truck                | 55,0 %                                | Truck, lorry over 32 tonnes, EURO 5 | 300         | 0,022823                | l/tkm | 6,85        |
| Railway              |                                       |                                     |             |                         | l/tkm |             |
| Boat                 |                                       |                                     |             |                         | l/tkm |             |
| Other Transportation |                                       |                                     |             |                         | l/tkm |             |

| Additional A4 information                             | Unit/Range                      | Value |
|---|---------------------------------|-------|
| Lilleström, Norway (truck / truck to jobsite: 798 km) | Multiplication factor<br>GWP/A4 | 1,86  |
| Karlsunde, Denmark (truck / truck to jobsite: 960 km) | Multiplication factor<br>GWP/A4 | 2,15  |
| Helsinki, Finland (truck / truck to jobsite: 800 km)  | Multiplication factor<br>GWP/A4 | 1,87  |

### Assembly (A5)

|                                       | Unit           | Value  |
|---------------------------------------|----------------|--------|
| Auxiliary                             | kg             |        |
| Water consumption                     | m <sup>3</sup> | 0,0002 |
| Electricity consumption               | kWh            | 0,0020 |
| Other energy carriers                 | MJ             |        |
| Material loss                         | kg             |        |
| Output materials from waste treatment | kg             | 0,0043 |
| Dust in the air                       | kg             |        |
| VOC emissions                         | kg             |        |

## LCA: Results

The LCA results are presented below for the declared unit defined on page 2 of the EPD document.

### System boundaries (X=included, MND=module not declared, MNR=module not relevant)

| Product stage |           |               | Construction installation stage |          | User stage |             |        |             |               |                        |                       | End of life stage          |           |                  |          | Beyond the system boundaries       |
|---------------|-----------|---------------|---------------------------------|----------|------------|-------------|--------|-------------|---------------|------------------------|-----------------------|----------------------------|-----------|------------------|----------|------------------------------------|
| Raw materials | Transport | Manufacturing | Transport                       | Assembly | Use        | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | De-construction demolition | Transport | Waste processing | Disposal | Reuse-Recovery-Recycling-potential |
| A1            | A2        | A3            | A4                              | A5       | B1         | B2          | B3     | B4          | B5            | B6                     | B7                    | C1                         | C2        | C3               | C4       | D                                  |
| X             | X         | X             | X                               | X        | MND        | MND         | MND    | MND         | MND           | MND                    | MND                   | MND                        | MND       | MND              | MND      | MND                                |

### Environmental impact

| Parameter | Unit                                 | A1-A3    | A4       | A5       |
|-----------|--------------------------------------|----------|----------|----------|
| GWP       | kg CO <sub>2</sub> -eq               | 3,44E-01 | 2,62E-02 | 1,51E-04 |
| ODP       | kg CFC11 -eq                         | 1,26E-08 | 5,10E-09 | 1,00E-10 |
| POCP      | kg C <sub>2</sub> H <sub>4</sub> -eq | 6,06E-05 | 4,23E-06 | 4,32E-08 |
| AP        | kg SO <sub>2</sub> -eq               | 7,55E-04 | 8,51E-05 | 8,06E-07 |
| EP        | kg PO <sub>4</sub> <sup>3-</sup> -eq | 1,62E-04 | 1,43E-05 | 1,55E-07 |
| ADPM      | kg Sb -eq                            | 7,31E-07 | 5,91E-08 | 1,35E-09 |
| ADPE      | MJ                                   | 3,98E+00 | 4,11E-01 | 1,40E-03 |

GWP Global warming potential; ODP Depletion potential of the stratospheric ozone layer; POCP Formation potential of tropospheric photochemical oxidants; AP Acidification potential of land and water; EP Eutrophication potential; ADPM Abiotic depletion potential for non fossil resources; ADPE Abiotic depletion potential for fossil resources

"Reading example: 9,0 E-03 = 9,0\*10<sup>-3</sup> = 0,009"

\*INA Indicator Not Assessed

## Resource use

| Parameter | Unit           | A1-A3    | A4       | A5       |
|-----------|----------------|----------|----------|----------|
| RPEE      | MJ             | 1,11E+00 | 7,42E-03 | 5,65E-03 |
| RPEM      | MJ             | 5,25E-01 | 0,00E+00 | 0,00E+00 |
| TPE       | MJ             | 1,64E+00 | 7,42E-03 | 5,65E-03 |
| NRPE      | MJ             | 2,41E+00 | 4,23E-01 | 1,36E-02 |
| NRPM      | MJ             | 1,82E+00 | 0,00E+00 | 0,00E+00 |
| TRPE      | MJ             | 4,24E+00 | 4,23E-01 | 1,36E-02 |
| SM        | kg             | 1,27E-03 | 0,00E+00 | 0,00E+00 |
| RSF       | MJ             | 1,20E-01 | 0,00E+00 | 5,34E-06 |
| NRSF      | MJ             | 2,34E-01 | 0,00E+00 | 0,00E+00 |
| W         | m <sup>3</sup> | 3,48E-03 | 9,98E-05 | 2,14E-04 |

RPEE Renewable primary energy resources used as energy carrier; RPEM Renewable primary energy resources used as raw materials; TPE Total use of renewable primary energy resources; NRPE Non renewable primary energy resources used as energy carrier; NRPM Non renewable primary energy resources used as materials; TRPE Total use of non renewable primary energy resources; SM Use of secondary materials; RSF Use of renewable secondary fuels; NRSF Use of non renewable secondary fuels; W Use of net fresh water

"Reading example: 9,0 E-03 =  $9,0 \cdot 10^{-3} = 0,009$ "

\*INA Indicator Not Assessed

## End of life - Waste

| Parameter | Unit | A1-A3    | A4       | A5       |
|-----------|------|----------|----------|----------|
| HW        | kg   | 8,02E-05 | 2,25E-07 | 7,40E-09 |
| NHW       | kg   | 8,05E-02 | 3,84E-02 | 1,30E-04 |
| RW        | kg   | INA*     | INA*     | INA*     |

HW Hazardous waste disposed; NHW Non hazardous waste disposed; RW Radioactive waste disposed

"Reading example: 9,0 E-03 =  $9,0 \cdot 10^{-3} = 0,009$ "

\*INA Indicator Not Assessed

## End of life - Output flow

| Parameter | Unit | A1-A3    | A4       | A5       |
|-----------|------|----------|----------|----------|
| CR        | kg   | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| MR        | kg   | 1,34E-04 | 0,00E+00 | 0,00E+00 |
| MER       | kg   | 1,21E-03 | 0,00E+00 | 4,26E-03 |
| EEE       | MJ   | INA*     | INA*     | INA*     |
| ETE       | MJ   | INA*     | INA*     | INA*     |

CR Components for reuse; MR Materials for recycling; MER Materials for energy recovery; EEE Exported electric energy; ETE Exported thermal energy

"Reading example: 9,0 E-03 =  $9,0 \cdot 10^{-3} = 0,009$ "

\*INA Indicator Not Assessed

## Additional Norwegian requirements

### Greenhouse gas emissions from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

| Electricity mix   | Data source            | Amount | Unit                       |
|---|------------------------|--------|----------------------------|
| Renewable electricity with Guarantee of Origin from LOS (kWh) | Modified ecoinvent 3.4 | 60,20  | g CO <sub>2</sub> -ekv/kWh |

### Dangerous substances

The product contains no substances given by the REACH Candidate list or the Norwegian priority list. The product is classified as hazardous waste (Avfallsforskriften, Annex III), see table.





| Name            | CASNo      | Amount |
|-----------------|------------|--------|
| Portland cement | 65997-15-1 | 25-50% |

### Indoor environment

The product has no impact on the indoor environment.

## Bibliography

ISO 14025:2010 Environmental labels and declarations - Type III environmental declarations - Principles and procedures.  
 ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines.  
 EN 15804:2012+A1:2013 Environmental product declaration - Core rules for the product category of construction products.  
 ISO 21930:2017 Sustainability in buildings and civil engineering works. Core rules for environmental product declarations of construction products.  
 ecoinvent v3, Allocation, cut-off by classification, Swiss Centre of Life Cycle Inventories.  
 Iversen et al., (2018) eEPD v3.0 - Background information for EPD generator system, LCA.no report number 04.18  
 Iversen et al., (2019) EPD generator for Saint-Gobain Weber and Scanspac - Background information and LCA data, LCA.no report number 05.18  
 NPCR Part A: Construction products and services. Ver. 1.0. April 2017, EPD-Norge.  
 NPCR 009 Part B for technical-chemical products. Ver. 1.0 June 2018, EPD-Norge.

|   |  |   |
|---|--|---|
|  <b>epd-norge.no</b><br>The Norwegian EPD Foundation | <b>Program operator and publisher</b><br>The Norwegian EPD Foundation<br>Post Box 5250 Majorstuen, 0303 Oslo, Norway | Phone: +47 23 08 80 00<br>e-mail: post@epd-norge.no<br>web: www.epd-norge.no    |
|    | <b>Owner of the declaration</b><br>Saint-Gobain Sweden AB, Weber<br>Box 415, SE-19162 Sollentuna                     | Phone: +46 8 625 6105<br>e-mail: anders.anderberg@weber.se<br>web: www.weber.se |
|    | <b>Author of the Life Cycle Assessment</b><br>LCA.no AS<br>Dokka 1C, 1671 Kråkerøy                                   | Phone: +47 916 50 916<br>e-mail: post@lca.no<br>web: www.lca.no                 |
|    | <b>Developer of EPD generator</b><br>LCA.no AS<br>Dokka 1C, 1671 Kråkerøy  | Phone: +47 916 50 916<br>e-mail: post@lca.no<br>web: www.lca.no                 |