


TECHNICAL DATA SHEET



DIAMETER	• 2.8
SHANK	• Ring
FINISHES	• Bright
COLLATION	• Paper laminated strip nails
TOOLS	• PSN90 - PSN100 - PF90 IM350 - IM90i - IM100i

MATERIAL PROPERTIES / DIMENSIONS

- **Tensile strength wire:**
minimum 700 N/mm²
- **Diameter, Shank (Ds)¹:**
2.80 mm
- **Diameter, Profile minimum (Dp):**
2.90 mm
- **Diameter, Head (Dh) / (Dh)¹ / (Dh)²:**
6.45 / 7.25 / 5.10 mm
- **Nail length total (Lt)¹:**
45 / 51 / 60 / 63 / 70 / 75 / 80 mm

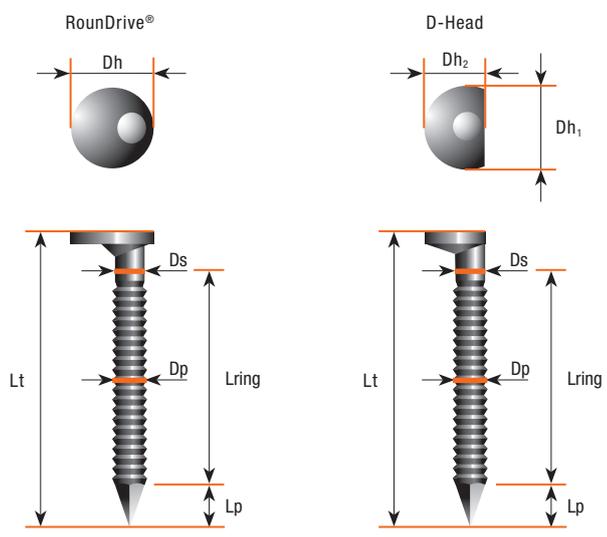

37 nails per strip



43 nails per strip

INTENDED USE - CORROSION PROTECTION

- **Timber-to-Timber**





Finishes	Eurocode 5 Service Class	Label colour on packaging
Bright EN10016-2	Service Class 1 Indoor use	Green



CHARACTERISTIC PARAMETERS

“Calculated or tested according to EUROCODE 5”

Head pull-through	Withdrawal	Yield moment
$f_{head,k}$ [N/mm ²]	$f_{ax,k}$ [N/mm ²]	$M_{y,k}$ [Nmm]
20.30	9.24	2 525



- Values are based on a mean characteristic wood density of 350 kg/m³.
- Characteristic parameters must always be reduced to design values by using partial factors.

NAIL DIMENSIONS*

Ds (in mm)	Length Lt (in mm)	Lring min. (in mm)	Lp max. (in mm)
2.8	45	35.0	4.2
2.8	51	41.0	4.2
2.8	60	41.3	4.2
2.8	63	41.5	4.2
2.8	70	48.5	4.2
2.8	75	53.5	4.2
2.8	80	58.5	4.2

* In order to select the correct nail length for a given connection please always consult standards and good practice on your local market.

¹ Tolerance according to EN10218-2 for wire diameter and according to EN14592 for the nail length.

² Tolerance ± 0.3 mm.

³ Please check availability of the reference in the Product Catalogue.