


Environmental product declaration

in accordance with ISO 14025 and EN 15804+A2

Platon Multi

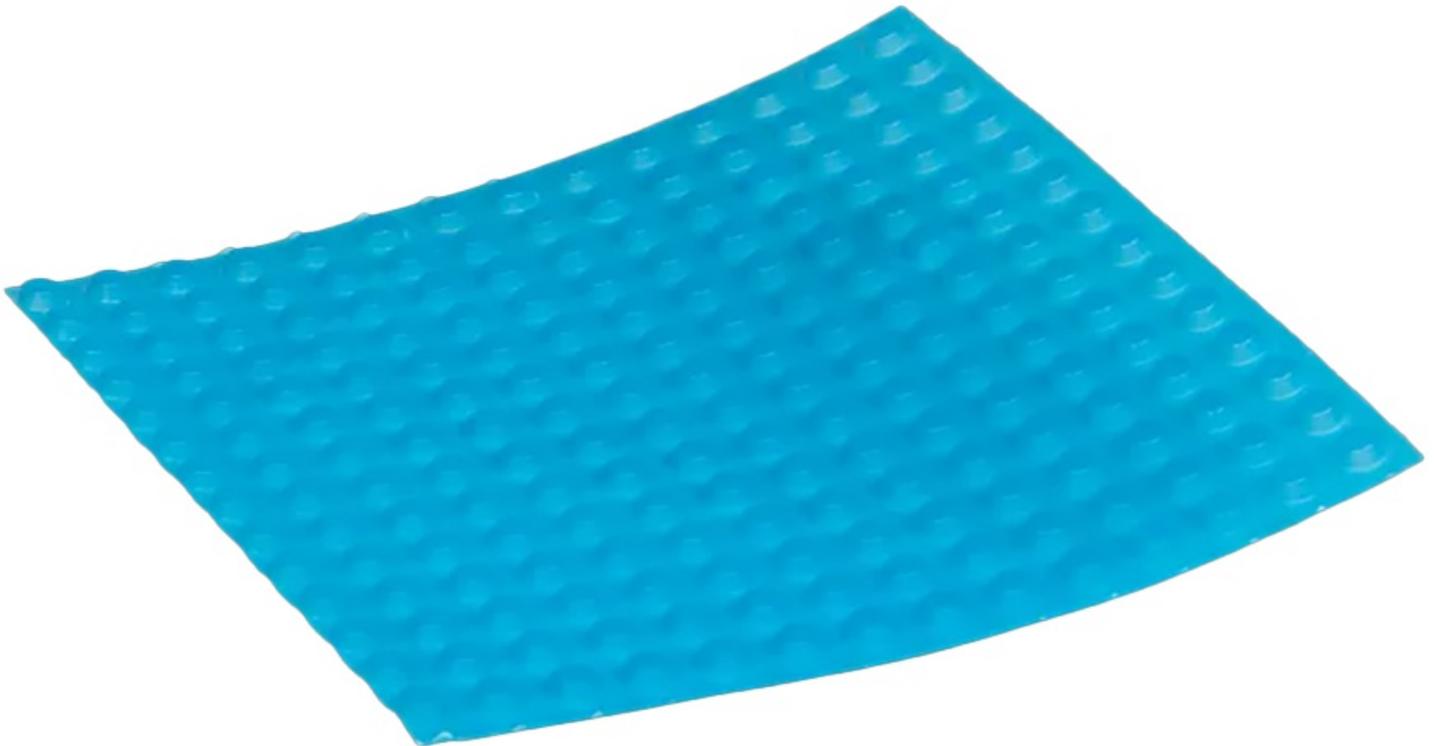

The Norwegian EPD Foundation

Owner of the declaration:

Isola AS

Platon Multi

Declared unit:

1 m²

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A1:2013 serves as core PCR

NPCR 022:2022 Part B for Roof waterproofing

Program operator:

The Norwegian EPD Foundation

Declaration number:

NEPD-5471-4777-EN

Registration number:

NEPD-5471-4777-EN

Issue date: 28.11.2023

Valid to: 28.11.2028

EPD Software:

LCA.no EPD generator ID: 70186

General information

Product

Platon Multi

Program operator:

Post Box 5250 Majorstuen, 0303 Oslo, Norway
The Norwegian EPD Foundation
Phone: +47 23 08 80 00
web: post@epd-norge.no

Declaration number: NEPD-5471-4777-EN

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A1:2013 serves as core PCR
NPCR 022:2022 Part B for Roof waterproofing

Statement of liability:

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

Declared unit:

1 m2 Platon Multi

Declared unit (cradle to gate) with option:

A1-A3,A4,A5,C1,C2,C3,C4,D

Functional unit:

General information on verification of EPD from EPD tools:

Independent verification of data, other environmental information and the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4. Verification of each EPD is made according to EPD-Norway's guidelines for verification and approval requiring that tools are i integrated into the company's environmental management system, ii the procedures for use of the EPD tool are approved by EPD-Norway, and iii the process is reviewed annually by an independent third party verifier. See Appendix G of EPD-Norway's General Programme Instructions for further information on EPD tools

Verification of EPD tool:

Independent third party verification of the EPD tool, background data and test-EPD in accordance with EPD Norway's procedures and guidelines for verification and approval of EPD tools.

Third party verifier:

Michael M. Jenssen, Asplan Viak AS

(no signature required)

Owner of the declaration:

Isola AS
Contact person: Trond Risberg
Phone: +47 98 89 18 86
e-mail: t.risberg@isola.no

Manufacturer:

Isola AS
Prestemoen 9
3946 Porsgrunn, Norway

Place of production:

Isola AS Fabrikk Notodden
Lienfossveien 5
3678 Notodden, Norway

Management system:

ISO 9001 Certificate No: QSC-6011, ISO 14001:2015

Organisation no:

928 764 745

Issue date: 28.11.2023

Valid to: 28.11.2028

Year of study:

2022

Comparability:

EPD of construction products may not be comparable if they not comply with EN 15804 and seen in a building context.

Development and verification of EPD:

The declaration is created using EPD tool lca.tools ver EPD2022.03, developed by LCA.no. The EPD tool is integrated in the company's management system, and has been approved by EPD Norway.

Collected/registered by: Marius Friberg Otterstad

Reviewer of company-specific input data and EPD: Trond Risberg

Approved:

Sign



Håkon Hauan, CEO EPD-Norge

Product

Product description:

Specialty product for capillary breaking effects for walls and flooring.

Product specification

A thermoplastic sheet is extruded and formed into a dimpled sheet using a vacuum roller. The sheet is then cooled and wound into a roll before being wrapped in plastic foil and placed on a pallet.

Materials	kg	%
Pigments and Fillers	0,01	2,00
Polypropylene (PP)	0,53	98,00
Total	0,54	

Packaging	kg	%
Packaging - Paper	0,00	1,00
Packaging - Plastic	0,01	10,00
Packaging - Wood	0,06	89,00
Total incl. packaging	0,61	

Technical data:

Weight per unit area: 540g/m²

Thickness: 0,6mm

Market:

Nordic and Europe

Reference service life, product

50 years

Reference service life, building

60 years

LCA: Calculation rules

Declared unit:

1 m² Platon Multi

Cut-off criteria:

All major raw materials and all the essential energy is included. The production processes for raw materials and energy flows with very small amounts (less than 1%) are not included. These cut-off criteria do not apply for hazardous materials and substances.

Allocation:

The allocation is made in accordance with the provisions of EN 15804. Incoming energy and water and waste production in-house is allocated equally among all products through mass allocation. Effects of primary production of recycled materials is allocated to the main product in which the material was used. The recycling process and transportation of the material is allocated to this analysis.

Data quality:

Specific data for the product composition are provided by the manufacturer. They represent the production of the declared product and were collected for EPD development in the year of study. Background data is based on registered EPDs according to EN 15804, Ostfold Research databases, ecoinvent and other LCA databases. The data quality of the raw materials in A1 is presented in the table below.


Materials	Source	Data quality	Year
Packaging - Paper	ecoinvent 3.6	Database	2019
Packaging - Plastic	ecoinvent 3.6	Database	2019
Packaging - Wood	ecoinvent 3.6	Database	2019
Pigments and Fillers	ecoinvent 3.6	Database	2019
Polypropylene (PP)	ecoinvent 3.6	Database	2019

System boundaries (X=included, MND=module not declared, MNR=module not relevant)

Product stage			Construction installation stage		Use stage							End of life stage				Beyond the system boundaries
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	MND	MND	MND	MND	MND	MND	MND	X	X	X	X	X

System boundary:

Fastening materials are not included. This is because many different types can be used and is not standardized.

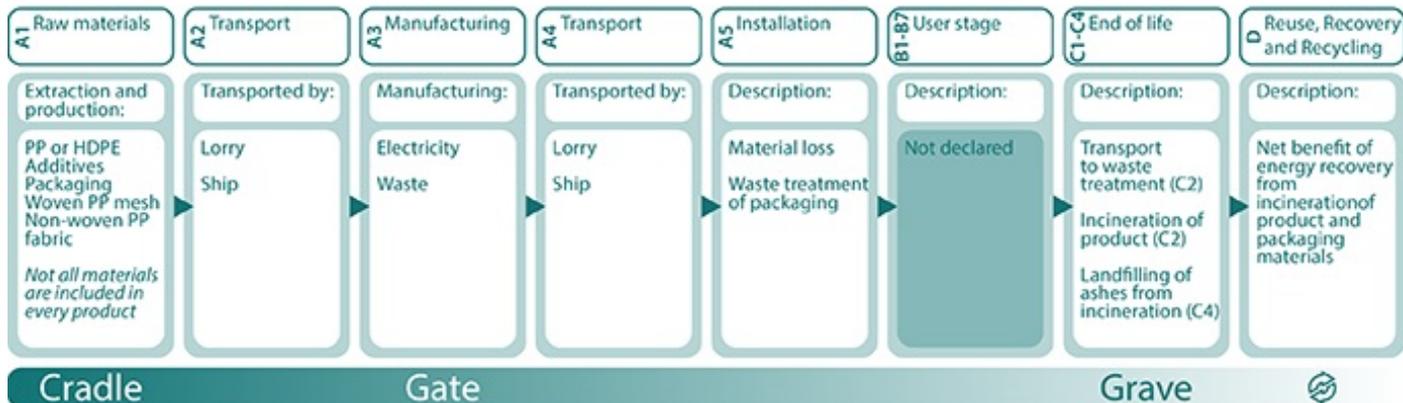

Additional technical information:

LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

The product is transported by truck and is installed using tape suitable for the dimpled sheet.

Transport from production place to user (A4)	Capacity utilisation (incl. return) %	Distance (km)	Fuel/Energy Consumption	Unit	Value (Liter/tonn)
Truck, EURO 6 (kgkm)	36,7 %	300	0,043	l/tkm	12,90
Assembly (A5)					
	Unit	Value			
Waste treatment, installation instructions (kg)	kg	0,00			
Waste treatment, packaging, pallet, EUR wooden pallet, single use (kg)	kg	0,06			
Waste treatment, packaging, plastic film (LDPE) (kg)	kg	0,01			
End of Life (C1, C3, C4)					
	Unit	Value			
Waste treatment, PP plastic product (kg)	kg/DU	0,54			
Transport to waste processing (C2)					
	Capacity utilisation (incl. return) %	Distance (km)	Fuel/Energy Consumption	Unit	Value (Liter/tonn)
Lastebil, EURO 6 (kgkm)	36,7 %	85	0,043	l/tkm	3,66
Waste processing (C3)					
	Unit	Value			
Waste treatment, PP plastic product, incineration (kg)	kg	0,54			
Disposal (C4)					
	Unit	Value			
Waste treatment, PP plastic product, landfilling of ashes from incineration (kg)	kg	0,11			
Benefits and loads beyond the system boundaries (D)					
	Unit	Value			
Substitution of electricity, in Norway (MJ)	MJ	0,89			
Substitution of thermal energy, district heating, in Norway (MJ)	MJ	13,44			

LCA: Results

The LCA results are presented below for the declared unit defined on page 2 of the EPD document.

Environmental impact										
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D	
 GWP-total	kg CO ₂ -eq	1,10E+00	2,98E-02	9,64E-02	0,00E+00	8,45E-03	1,38E+00	2,25E-03	-8,07E-02	
 GWP-fossil	kg CO ₂ -eq	1,18E+00	2,98E-02	2,71E-03	0,00E+00	8,45E-03	1,38E+00	2,24E-03	-7,79E-02	
 GWP-biogenic	kg CO ₂ -eq	-8,84E-02	1,23E-05	9,37E-02	0,00E+00	3,50E-06	1,53E-05	1,39E-06	-1,61E-04	
 GWP-luluc	kg CO ₂ -eq	4,22E-04	1,06E-05	5,05E-07	0,00E+00	3,01E-06	1,91E-06	4,82E-07	-2,68E-03	
 ODP	kg CFC11 -eq	3,59E-08	6,75E-09	3,28E-10	0,00E+00	1,91E-09	1,12E-09	4,28E-10	-5,68E-03	
 AP	mol H+ -eq	4,64E-03	8,57E-05	1,45E-05	0,00E+00	2,43E-05	1,71E-04	1,12E-05	-6,42E-04	
 EP-FreshWater	kg P -eq	1,82E-05	2,38E-07	2,19E-08	0,00E+00	6,75E-08	1,24E-07	2,70E-08	-6,92E-06	
 EP-Marine	kg N -eq	8,14E-04	1,70E-05	6,87E-06	0,00E+00	4,80E-06	8,14E-05	3,78E-06	-2,10E-04	
 EP-Terrestrial	mol N -eq	9,04E-03	1,90E-04	6,55E-05	0,00E+00	5,37E-05	8,80E-04	4,23E-05	-2,27E-03	
 POCP	kg NMVOC -eq	4,01E-03	7,26E-05	1,72E-05	0,00E+00	2,06E-05	2,12E-04	1,20E-05	-6,26E-04	
 ADP-minerals&metals ¹	kg Sb -eq	1,13E-05	8,23E-07	3,25E-08	0,00E+00	2,33E-07	5,51E-08	2,34E-08	-7,75E-07	
 ADP-fossil ¹	MJ	4,08E+01	4,51E-01	2,38E-02	0,00E+00	1,28E-01	9,44E-02	3,32E-02	-1,11E+00	
 WDP ¹	m ³	4,99E+01	4,36E-01	4,52E-02	0,00E+00	1,24E-01	2,24E-01	1,66E-01	-1,39E+01	

GWP Global warming potential; ODP Depletion potential of the stratospheric ozone layer; POCP Formation potential of tropospheric photochemical oxidants; AP Acidification potential of land and water; EP Eutrophication potential; ADPM Abiotic depletion potential for non fossil resources; ADPE Abiotic depletion potential for fossil resources

¹Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"

*INA Indicator Not Assessed

1. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator

3. Eutrophication aquatic freshwater shall be in kg P-eq., there is a typo in EN 15804:2012+A2:2019 regarding this unit. Eutrophication calculated as PO4-eq is presented on page 11

Remarks to environmental impacts

Additional environmental impact indicators										
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D	
 PM	Disease incidence	4,12E-08	1,83E-09	1,85E-10	0,00E+00	5,17E-10	8,27E-10	1,78E-10	-3,89E-08	
 IRP ²	kgBq U235 -eq	2,72E-02	1,97E-03	9,02E-05	0,00E+00	5,58E-04	1,71E-04	1,42E-04	-7,12E-03	
 ETP-fw ¹	CTUe	6,90E+00	3,34E-01	2,63E-02	0,00E+00	9,47E-02	2,84E-01	3,45E-02	-6,06E+00	
 HTP-c ¹	CTUh	3,18E-10	0,00E+00	2,00E-12	0,00E+00	0,00E+00	3,20E-11	2,00E-12	-1,11E-10	
 HTP-nc ¹	CTUh	8,02E-09	3,65E-10	1,20E-10	0,00E+00	1,03E-10	1,29E-09	5,20E-11	-5,81E-09	
 SQP ¹	dimensionless	1,20E+01	3,15E-01	1,85E-02	0,00E+00	8,93E-02	1,22E-02	7,73E-02	-7,45E+00	

PM = Particulate Matter emissions; IRP = Ionizing radiation – human health; ETP-fw = Eco toxicity – freshwater; HTP-c = Human toxicity – cancer effects; HTP-nc = Human toxicity – non cancer effects; SQP = Potential Soil Quality Index (dimensionless)

"Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"

*INA Indicator Not Assessed

1. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator
2. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

Resource use										
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D	
 PERE	MJ	2,31E+00	6,45E-03	5,09E-04	0,00E+00	1,83E-03	3,04E-03	1,09E-03	-6,88E+00	
 PERM	MJ	8,56E-01	0,00E+00	-8,56E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	
 PERT	MJ	3,16E+00	6,45E-03	-8,56E-01	0,00E+00	1,83E-03	3,04E-03	1,09E-03	-6,88E+00	
 PENRE	MJ	2,42E+01	4,51E-01	2,38E-02	0,00E+00	1,28E-01	9,44E-02	3,32E-02	-1,11E+00	
 PENRM	MJ	1,81E+01	0,00E+00	-5,65E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	
 PENRT	MJ	4,23E+01	4,51E-01	-5,41E-01	0,00E+00	1,28E-01	9,44E-02	3,32E-02	-1,11E+00	
 SM	kg	4,13E-04	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	
 RSF	MJ	3,38E-02	2,31E-04	1,45E-05	0,00E+00	6,54E-05	9,08E-05	2,78E-05	-1,21E-03	
 NRSF	MJ	6,97E-03	8,25E-04	1,40E-04	0,00E+00	2,34E-04	0,00E+00	1,95E-03	-4,08E-01	
 FW	m ³	2,04E-02	4,82E-05	1,64E-05	0,00E+00	1,37E-05	2,75E-04	3,01E-05	-8,29E-03	

RPEE Renewable primary energy resources used as energy carrier; RPEM Renewable primary energy resources used as raw materials; TPE Total use of renewable primary energy; NRPE Non renewable primary energy resources used as energy carrier; NRPM Non renewable primary energy resources used as materials; TRPE Total use of non renewable primary energy; SM Use of secondary materials; RSF Use of renewable secondary fuels; NRSF Use of non renewable secondary fuels; W Use of net fresh water

"Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"

*INA Indicator Not Assessed

End of life - Waste										
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D	
 HWD	kg	8,71E-04	2,32E-05	0,00E+00	0,00E+00	6,59E-06	0,00E+00	1,05E-01	-5,24E-05	
 NHWD	kg	1,20E-01	2,19E-02	7,50E-02	0,00E+00	6,21E-03	0,00E+00	1,16E-02	-2,63E-02	
 RWD	kg	2,62E-05	3,07E-06	0,00E+00	0,00E+00	8,70E-07	0,00E+00	2,03E-07	-5,83E-06	

HW Hazardous waste disposed; NHW Non hazardous waste disposed; RW Radioactive waste disposed

*Reading example: 9,0 E-03 = $9,0 \cdot 10^{-3} = 0,009$

*INA Indicator Not Assessed

End of life - Output flow										
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D	
 CRU	kg	0,00E+00								
 MFR	kg	1,40E-04	0,00E+00	7,42E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	
 MER	kg	1,50E-05	0,00E+00	6,06E-02	0,00E+00	0,00E+00	5,40E-01	0,00E+00	0,00E+00	
 EEE	MJ	6,39E-05	0,00E+00	4,21E-02	0,00E+00	0,00E+00	8,88E-01	0,00E+00	0,00E+00	
 EET	MJ	9,66E-04	0,00E+00	6,37E-01	0,00E+00	0,00E+00	1,34E+01	0,00E+00	0,00E+00	

CR Components for reuse; MR Materials for recycling; MER Materials for energy recovery; EEE Exported electric energy; ETE Exported thermal energy

*Reading example: 9,0 E-03 = $9,0 \cdot 10^{-3} = 0,009$

*INA Indicator Not Assessed

Biogenic Carbon Content		
Indicator	Unit	At the factory gate
Biogenic carbon content in product	kg C	0,00E+00
Biogenic carbon content in accompanying packaging	kg C	2,55E-02

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO₂

Additional requirements

Greenhouse gas emissions from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

Electricity mix	Data source	Amount	Unit
Electricity, Norway (kWh)	ecoinvent 3.6	24,33	g CO2-eq/kWh

Dangerous substances

No substances given by the REACH Candidate list or the Norwegian priority list are intentionally added to the product.

Indoor environment

Used in the walls or under the floor of a room.

Additional Environmental Information

Additional environmental impact indicators required in NPCR Part A for construction products									
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWPIOBC	kg CO ₂ -eq	1,11E+00	2,98E-02	0,00E+00	0,00E+00	8,45E-03	1,38E+00	2,24E-03	-7,96E-02

GWPIOBC: Global warming potential calculated according to the principle of instantaneous oxidation. In order to increase the transparency of biogenic carbon contribution to climate impact, the indicator GWP-IOBC is required as it declares climate impacts calculated according to the principle of instantaneous oxidation. GWP-IOBC is also referred to as GWP-GHG in context to Swedish public procurement legislation.

Bibliography

ISO 14025:2010 Environmental labels and declarations - Type III environmental declarations - Principles and procedures.

ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines.

EN 15804:2012+A1:2013 Environmental product declaration - Core rules for the product category of construction products.

ISO 21930:2017 Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products.

ecoinvent v3, Allocation, cut-off by classification, Swiss Centre of Life Cycle Inventories.

Iversen et al., (2018) eEPD v3.0 - Background information for EPD generator system. LCA.no report number 04.18.

Ruttenborg et al., (2020) EPD generator for Isola AS - Background information for customer application and LCA data, LCA.no report number 05.20

NPCR Part A: Construction products and services. Ver. 1.0. April 2017, EPD-Norge.

NPCR 022 Part B for Roof waterproofing. Ver. 2.0 June 2018, EPD-Norge.

 epd-norway <small>Global Program Operator</small>	Program operator and publisher The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo, Norway	Phone: +47 23 08 80 00 e-mail: post@epd-norge.no web: www.epd-norge.no
	Owner of the declaration: Isola AS Prestemoen 9, 3946 Porsgrunn	Phone: +47 98 89 18 86 e-mail: t.risberg@isola.no web: www.isola.no
	Author of the Life Cycle Assessment LCA.no AS Dokka 6B, 1671	Phone: +47 916 50 916 e-mail: post@lca.no web: www.lca.no
	Developer of EPD generator LCA.no AS Dokka 6B,1671 Kråkerøy	Phone: +47 916 50 916 e-mail: post@lca.no web: www.lca.no
	ECO Platform ECO Portal	web: www.eco-platform.org web: ECO Portal